

(19) World Intellectual Property Organization  
International Bureau



Rec'd PCT/PTO 08 SEP 2004  
10/507023, 023

(43) International Publication Date  
25 September 2003 (25.09.2003)


PCT

(10) International Publication Number  
WO 03/078075 A1

- (51) International Patent Classification<sup>7</sup>: B05B 11/00, (72) Inventor; and  
B65D 47/34 (75) Inventor/Applicant (for US only): VAN DER HEIJDEN,  
Edgar, Ivo, Maria [NL/NL]; 11, Waterval, NL-1721 DX  
Broek Op Langedijk (NL).
- (21) International Application Number: PCT/NL03/00182
- (22) International Filing Date: 11 March 2003 (11.03.2003) (74) Agent: WITTOP KONING, T., H.; Exter Polak & Char-  
louis B.V., P.O. Box 3241, NL-2280 GE Rijswijk (NL).
- (25) Filing Language: Dutch (81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,  
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,  
UZ, VC, VN, YU, ZA, ZM, ZW.
- (26) Publication Language: English (84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
- (30) Priority Data:  
1020200 19 March 2002 (19.03.2002) NL  
1022197 18 December 2002 (18.12.2002) NL
- (71) Applicant (for all designated States except US):  
AIRSPRAY INTERNATIONAL B. V. [NL/NL]; 9,  
Ivoorstraat, 1812 RE Alkmaar (NL).

[Continued on next page]

(54) Title: DISPENSING UNIT

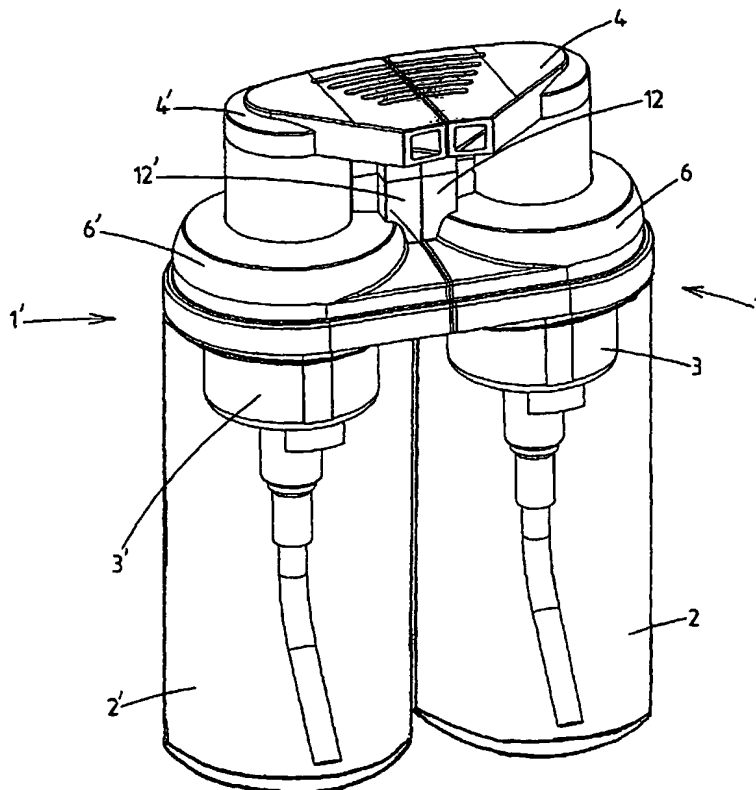

(57) Abstract: The invention relates to a combination of a first container and a second container to form a dispensing unit. The first and second containers each have a reservoir for a liquid substance and pump which is secured to the reservoir, can be actuated by hand and has a dispensing opening and a pump-actuating button for dispensing substance from the reservoir. The combination also comprises coupling means for coupling together the first and second containers in a position next to one another. The invention is characterized in that the coupling means comprise: one or more first coupling members, which are each arranged on the first container, and one or more second coupling means, which are each arranged on the second container and which can each be directly coupled to an associated first coupling member on the first container. It is preferable for a first coupling member and an associated second coupling member each to be arranged fixedly on the assembly of reservoir and pump of the associated container in order to create a stable coupling between the assemblies reservoir and pump of the two containers.